


PRODUCT DESCRIPTION	STUCCO MATT Classic Effect is a decorative coating that allows you to imitate old decorative techniques. STUCCO MATT Classic Effect is a smooth, pleasant to the touch surface that gives the interior an exclusive and individual character.
PRODUCT USE	Inside buildings
METHOD OF TINTING	Possibility of tinting with Cameleo pigments.
SUBSTRATE PREPARATION	According to the Technical Data Sheet of the Product STUCCO MATT.
PRODUCT PREPARATION	According to the Technical Data Sheet of the Product STUCCO MATT.

EFFECT STEPS

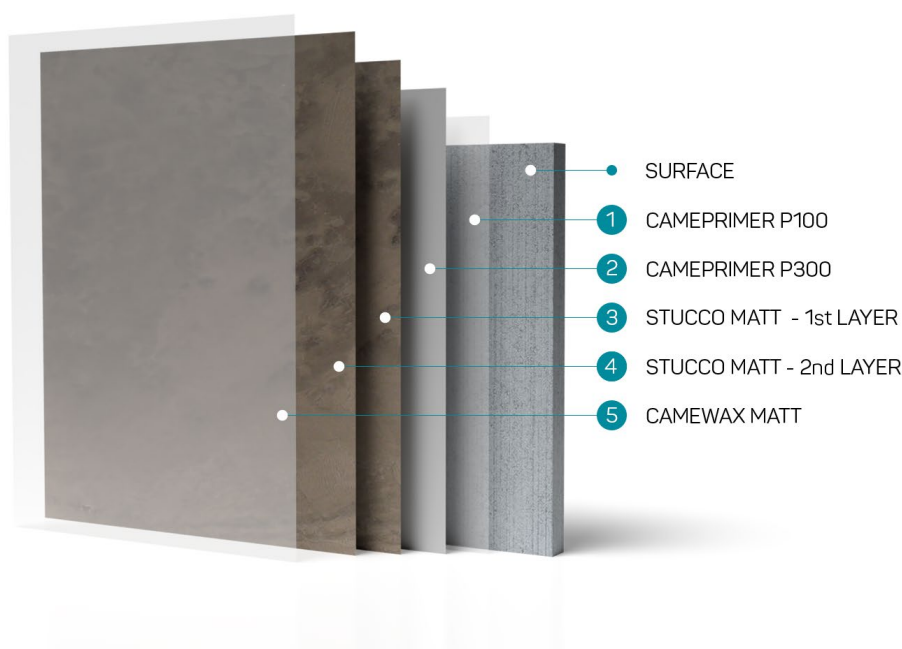

PRODUCTS WITHIN THE EFFECT	Preparation and execution of the Cameleo decorative effect should be carried out by a trained contractor.
1. Primer (optional):	CAMEPRIMER P100
Efficiency to:	0.115 l/m ²
Application tools:	Paint roller, brush
Application:	Apply the CAMEPRIMER P100 primer once on a properly prepared substrate with a paint roller.
Drying time:	2 h
2. Primer paint:	CAMEPRIMER P300
Efficiency to:	0.115 l/m ²
Application tools:	Paint roller, brush
Application:	Apply the CAMEPRIMER P300 once on the properly prepared substrate with a paint roller.
Drying time:	2 h
3. Structural paint:	STUCCO MATT (first layer)
Efficiency to:	0.7 kg/m ²
Application tools:	Venetian trowel
Application:	Apply a layer of STUCCO MATT structural paint with a venetian trowel on the primed, dry substrate. This should be done in such a way that no thickening forms. In this way, cover the entire surface and let it dry.
Drying time:	4 h
4. Structural paint:	STUCCO MATT (second layer)

Efficiency to:	0.3 kg/m ²
Application tools:	Venetian trowel
Application:	Using the venetian putty technique (with small, short movements), cover the entire first layer of structural paint, creating a delicate pattern. Perform this work over the entire surface. Then leave it to dry.
Drying time:	2 h
5. Matt protective wax:	CAMEWAX MATT TRANSPARENT
Efficiency to:	0.04 kg/m ²
Application tools:	Venetian trowel flex
Application:	On the dry surface of STUCCO MATT structural paint, apply a small amount of CAMEWAX MATT TRANSPARENT with a venetian trowel flex. After applying the wax, gently smooth the whole thing. After 10 – 15 minutes after applying the wax, gently shine the waxed surface with the edge of a venetian trowel flex and let it dry. Repeat the operation in rooms particularly exposed to dirt.
Drying time:	2 h
EFFECT DRYING TIME	At a temperature of 20°C and 50% air humidity.
Dry to touch:	6 hours after applying the last layer
Full hardening:	After 7 days
CLEANING OF TOOLS	Warm soapy water
CLEANING THE SURFACE	It is possible to clean the surface after 7 days from the end of the full application. Do not use detergents. Clean with soap and water.
APPLICATION CONDITIONS	Application temperature +10°C – +30°C. The minimum temperature of the substrate: +10°C. Maximum substrate temperature: +30°C. Substrate humidity should not exceed 4%. Maximum air humidity: 75%.
GUIDANCE	Technical Data Sheet of the Effect is a description of the decorative effect along with the application stages. It does not guarantee the correct execution of the effect. The final appearance of the surface on which the decorative technique is performed is influenced by the contractor's individual way of working and his experience. Before starting the decorative effect, it is suggested to apply it on a trial surface. On surfaces exceeding 10 m ² , work in 2 – 3 people. You can make the effect yourself, then you should divide the plane into smaller fragments. The suggested surface for independent work should not exceed 10 m ² . Building scaffolding is recommended for surfaces greater than 3 m in height.
COMMENTS	The colors shown in the catalog may differ from the actual colors on the wall. The colors depend on the method of application, texture, gloss, lighting, sunlight, and the types and intensity of other colors in the environment. It should be remembered to properly make sealing layers in places exposed to permanent moisture. The conditions of storage, transport and use as well as the end result are beyond our control and therefore cannot constitute a guarantee in the legal sense. In any case, the statutory provisions and any rights of third parties must be observed.
WARRANTY	
Per product:	Cameleo Leśniewicz Grądkowska Spółka Jawna guarantees that Cameleo products have commercial quality in accordance with the standards declared by Cameleo. Cameleo products are covered by the warranty, provided that they are used in accordance with the instructions contained in the Technical Data Sheets. The products are not covered by the warranty if they are not used in accordance with the information contained in the Technical Data Sheets. Liability under this warranty (if the product turns out to be defective) is limited only to replacing the product or refunding the purchase price of the product. This warranty is valid for one year from the purchase of the product.
Per effect:	Cameleo Leśniewicz Grądkowska Spółka Jawna guarantees that the Cameleo effects are of commercial quality in accordance with the standards declared by Cameleo in the Technical Data Sheets of the Product and the Technical Data Sheet of the Effect. Cameleo effects are covered by the warranty, provided that they were made by certified persons or companies trained in professional application at the premises of Cameleo or a certified representative of Cameleo products in Poland and the world. Liability under this warranty (if the effect turns out to be defective and was made by a certified Cameleo contractor) is limited only to the replacement of products (included in the effect) or reimbursement of the purchase price of the products included in the effect. This warranty is valid for a period of 2 years from the date of purchase of the products included in the effect.