


PRODUCT DESCRIPTION	TRAVERTINE ROUGH Classic Effect is a decorative effect imitating the structure of travertine.
PRODUCT USE	Inside and outside buildings
METHOD OF TINTING	Possibility of tinting with Cameleo pigments.
SUBSTRATE PREPARATION	According to the Technical Data Sheet of the Product TRAVERTINE ROUGH.
PRODUCT PREPARATION	According to the Technical Data Sheet of the Product TRAVERTINE ROUGH.

EFFECT STEPS

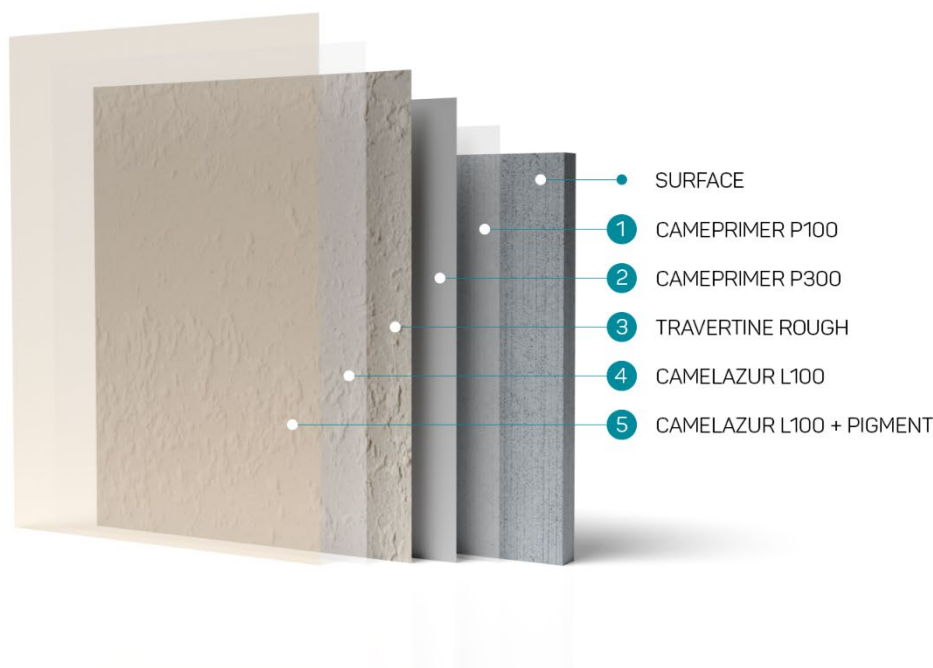

PRODUCTS WITHIN THE EFFECT	Preparation and execution of the Cameleo decorative effect should be carried out by a trained contractor.
1. Primer (optional):	CAMEPRIMER P100
Efficiency to:	0.115 l/m ²
Application tools:	Paint roller, brush
Application:	Apply the CAMEPRIMER P100 primer once on a properly prepared substrate with a paint roller.
Drying time:	2 h
2. Primer paint :	CAMEPRIMER P300
Efficiency to:	0.115 l/m ²
Application tools:	Paint roller, brush
Application:	Apply the CAMEPRIMER P300 once on the properly prepared substrate with a paint roller.
Drying time:	2 h
3. Decorative plaster:	TRAVERTINE ROUGH
Efficiency to:	Dry product: 1,25 kg/m ²
Application tools:	Venetian trowel, paint roller
Application:	Apply a layer of TRAVERTINE ROUGH plaster on the properly prepared substrate. Work on an area of 3 – 4 m ² . After applying the plaster, use a paint roller to form an appropriate pattern (tearing the plaster up) and leave it for about 20 – 25 minutes. Then, gently smooth the entire surface with a venetian trowel and let it dry. Work continuously until the surface is completely covered with TRAVERTINE ROUGH.

Drying time:	12 h
4. Decorative varnish:	CAMELAZUR L100
Efficiency to:	0.13 l/m ²
Application tools:	Paint roller (microfiber), brush
Application:	After 12 hours, the colorless CAMELAZUR L100 varnish should be applied on the dry surface of TRAVERTINE ROUGH plaster with a paint roller, so as not to leave stains.
Drying time:	4 h
5. Decorative varnish:	CAMELAZUR L100 + PIGMENT
Efficiency to:	0.04 l/m ²
Application tools:	Paint roller (microfiber), brush, polyester sponge
Application:	After 4 hours, tinted CAMELAZUR L100 (tinted with Cameleo pigments), should be applied on the dry surface of TRAVERTINE ROUGH, and then use the sponge to remove excess of the varnish. Work on an area of 2 – 3 m ² . Work continuously until the surface is completely covered with CAMELAZUR L100 + pigment.
Drying time:	4 h
EFFECT DRYING TIME	At a temperature of 20°C and 50% air humidity.
Dry to touch:	4 h hours after applying the last layer
Full hardening:	After 14 days
CLEANING OF TOOLS	Warm soapy water
CLEANING THE SURFACE	It is possible to clean the surface after 14 days from the end of the full application. Do not use detergents. Clean with soap and water.
APPLICATION CONDITIONS	Application temperature +10°C – +30°C. The minimum temperature of the substrate: +10°C. Maximum substrate temperature: +30°C. Substrate humidity should not exceed 4%. Maximum air humidity: 75%.
GUIDANCE	Technical Data Sheet of the Effect is a description of the decorative effect along with the application stages. It does not guarantee the correct execution of the effect. The final appearance of the surface on which the decorative technique is performed is influenced by the contractor's individual way of working and his experience. Before starting the decorative effect, it is suggested to apply it on a trial surface. On surfaces exceeding 10 m ² , work in 2 – 3 people. You can make the effect yourself, then you should divide the plane into smaller fragments. The suggested surface for independent work should not exceed 10 m ² . Building scaffolding is recommended for surfaces greater than 3 m in height.
COMMENTS	The colors shown in the catalog may differ from the actual colors on the wall. The colors depend on the method of application, texture, gloss, lighting, sunlight, and the types and intensity of other colors in the environment. It should be remembered to properly make sealing layers in places exposed to permanent moisture. The conditions of storage, transport and use as well as the end result are beyond our control and therefore cannot constitute a guarantee in the legal sense. The statutory provisions and any rights of third parties must always be observed.
WARRANTY	
Per product:	Cameleo Leśniewicz Gradkowska Spółka Jawna guarantees that Cameleo products have commercial quality in accordance with the standards declared by Cameleo. Cameleo products are covered by the warranty, provided that they are used in accordance with the instructions contained in the Technical Data Sheets. The products are not covered by the warranty if they are not used in accordance with the information contained in the Technical Data Sheets. Liability under this warranty (if the product turns out to be defective) is limited only to replacing the product or refunding the purchase price of the product. This warranty is valid for one year from the purchase of the product.
Per effect:	Cameleo Leśniewicz Gradkowska Spółka Jawna guarantees that the Cameleo effects are of commercial quality in accordance with the standards declared by Cameleo in the Technical Data Sheets of the Product and the Technical Data Sheet of the Effect. Cameleo effects are covered by the warranty, provided that they were made by certified persons or companies trained in professional application at the premises of Cameleo or a certified representative of Cameleo products in Poland and the world. Liability under this warranty (if the effect turns out to be defective and was made by a certified Cameleo contractor) is limited only to the replacement of products (included in the effect) or reimbursement of the purchase price of the products included in the effect. This warranty is valid for a period of 2 years from the date of purchase of the products included in the effect.